


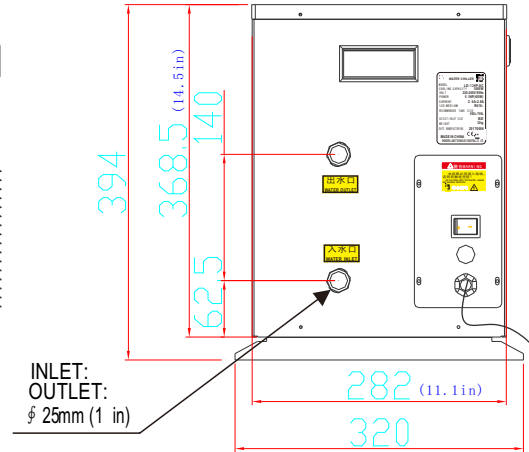


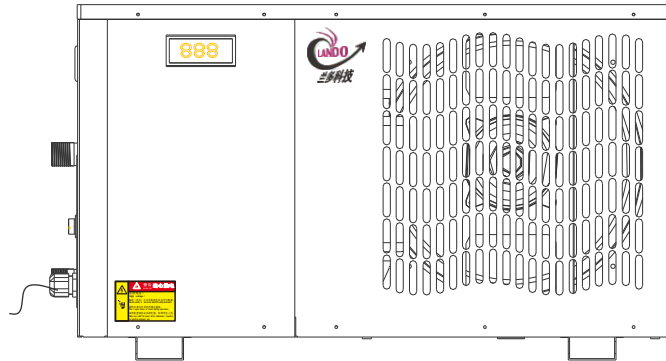

Modify	Tag	Note	Drawer	Date

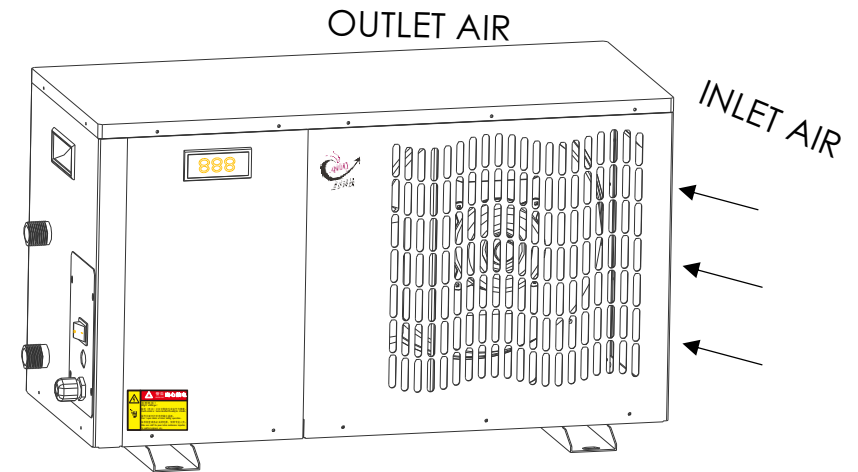

Install The Location Drawing

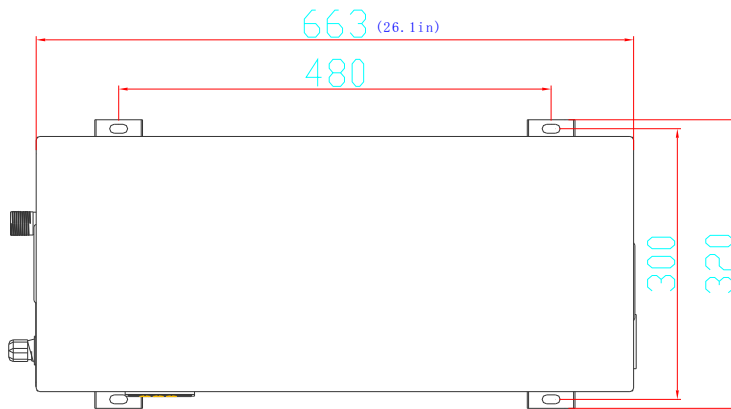

Accessories:  
- 2 x Sealing ring  
- 2 x Nut kit

Dimensions	662mm x 282mm x 369mm (h)	26.1 in x 11.1 in x 14.5 in (H)
Weight	32 kg	70 LB
Voltage-Frequency	220-240V - 50Hz	110-120V - 60Hz
Current Consumption	2,2-2,5 A	4,3-4,9 A
Compressor Power	0.5 HP	0.5 HP
Power Consumption (Cooling)	450 W	1550 Btu/h
Power Consumption (Heating)	400 W	1350 Btu/h
Cooling Capacity *	1600 W	5450 Btu/h
Minimum Water Flow	≥2000 L/h	530 Usgal/h
<b>Recommended Tank Size</b>	500-700 L	132-185 Usgal
<b>Outlet/inlet Size</b>	∅25 mm	1 in
Ambient Temperature Range	5°C - 38°	32°F - 100°F
Certification	CE UL CCC	
Protection Grade	IPX4	

\* The value reported refers to the following condition: Room temperature 32°C (90°F), Water temperature 30°C (84°F)

Material:	Drawing: LD-1/2HP-BC - technical data		
Thickness:	File: LD_1/2HP_BC_technical_drawing		
Finishing:	Your.code:	Code:	
Volume:	Tol.	Scale: 1:1	Date: 17/02/2012
Approved:	Contact Person:Fany Fan Email:sales@cnlando.com Skype:Fany828 Tel. +86 158 14051508 Fax86-755-28241365 http://www.lando-chillers.com/		Shenzhen Lando Technology Industrial Co.,Ltd
	Drawer: CHAN LANDO		